

DL 600 G LED IP44

LED DOWNLIGHTS 230V



*Recessed, circular soffit lamp,
designed for the interior.*

*LED technology, two independent
circuits and passive cooling.*

*Surface of reflector is adapted,
thanks to micro-pyramidal
polycarbonate diffuser radiates a
subdued brightness.*

*Used screw less terminal block
It gives the possibility of continuous
installation.*

Lamp complies certificate ENEC.


*Zapustené, kruhové podhl'adové
svietidlo, určené do interiéru.*

*Technológia LED, dva nezávislé
okruhy a pasívne chladenie.*

*Reflektor je povrchovo upravený,
vďaka mikropyramídovému
polykarbonátovému difúзору
vyžaruje príjemný tlmený jas.*

*Použitá bezskrúťová svorkovnica
dáva možnosť priebežnej
montáži.*


Svietidlo spĺňa certifikát ENEC.



DL 600 G LED IP44

Type / Typ	Power Výkon (W)	Luminous flux Svetelný tok (lm)	Dimensions Rozmery AxB (mm)	Color temperature Farba (K)
DL 600 G LED	18W	1580	Ø 200x100	3000
DL 600 G LED	25W	2180	Ø 200x100	3000
DL 600 G LED	32W	3030	Ø 200x100	3000
DL 600 G LED	18W	1810	Ø 200x100	4000
DL 600 G LED	25W	2500	Ø 200x100	4000
DL 600 G LED	32W	3150	Ø 200x100	4000

Dimensions / Rozmery

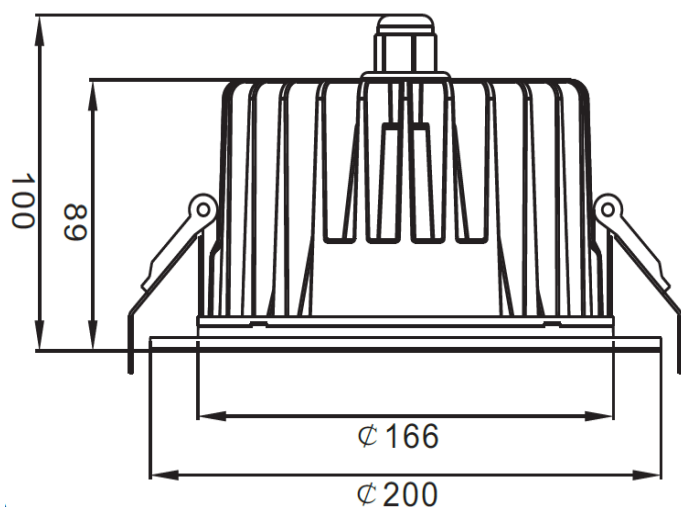

Technical data / Technické informácie

Lower optical part: Matt micropyramide

LOR: 76,9 %

Color of fitting: RAL 9003 sheen

Electronics: DALI driver OSRAM /
HELVAR

Light source: LED module CREE /
OSRAM 3000,4000K, CRI 85

Lumious flux: 1580-3150 lm

Power: 18,25,32W

Protection degree: IP44

Spodná optická časť: Matná mikropyramída

LOR: 76,9 %

Farba svietidla: RAL 9003 lesklá

Elektronika: DALI predradník OSRAM /
HELVAR

Svetelný zdroj: LED modul CREE /
OSRAM 3000,4000K, CRI 85

Svetelný tok: 1580-3150lm

Príkon: 18,25,32W

Stupeň krytia: IP44