

LFL SYM ASYM NAR IP 65

LED Reflectors lights IP65 / LED Reflektorové svietidlá IP65



*High effective led projector.
Light is suitable for
middle-big area
illumination.*

*Vysokoučinný,
univerzálny
asymetrický ledkový
projektor vhodný na
osvetlenie
stredneveľkých plôch.*



LFL SYM ASYM NAR IP 65

Type / Typ	Power Výkon (W)	Lamp type Typ zdroja	Luminous flux Svetelný tok (lm)	Color Temperature Farba (K)
LFL SYM ASYM 40	40W	LED	4800	3000 / 4000 / 5000
LFL SYM ASYM 60	60W	LED	7200	3000 / 4000 / 5000
LFL SYM ASYM 80	80W	LED	9600	3000 / 4000 / 5000
LFL SYM ASYM 100	100W	LED	12000	3000 / 4000 / 5000
LFL SYM ASYM 120	120W	LED	14400	3000 / 4000 / 5000
LFL SYM ASYM 150	150W	LED	18000	3000 / 4000 / 5000
LFL SYM ASYM 180	180W	LED	21600	3000 / 4000 / 5000
LFL SYM ASYM 200	200W	LED	24000	3000 / 4000 / 5000
LFL SYM ASYM 240	240W	LED	26400	3000 / 4000 / 5000





Photometric diagrams for optics

30°x60°
(polarized light 10°)

65°x120°
(polarized light 55°)

15°

30°

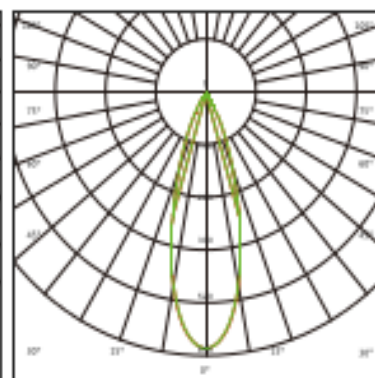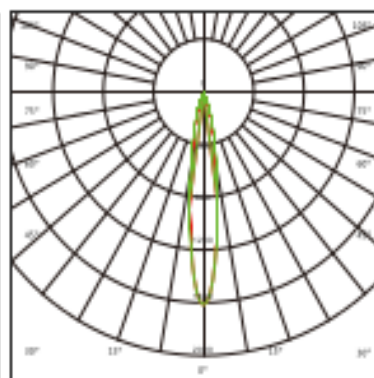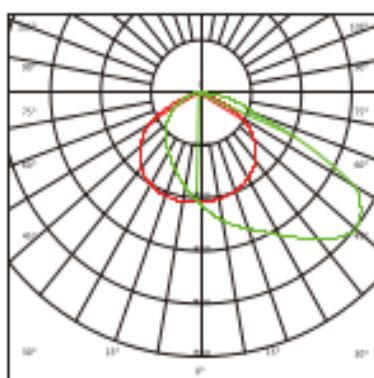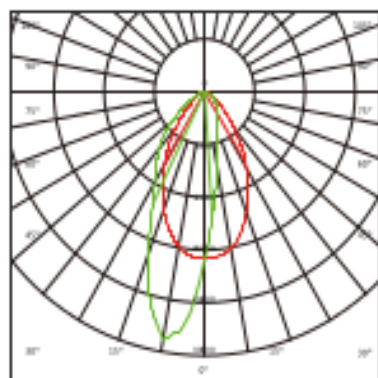

Desing / Vyhotovenie

Body of the luminary is made of die cast aluminum.

Sur – face treatment – powder coating color (komaxit RAL 9005 or RAL9010) heat tempered.

Luminary protection degree IP 65 is provided by seal and cable fasteners.

Fixtures are constructed for easiest adjusting, change, cleaning and maintenance.

Glass: thickness 4mm, heat tempered.

Teleso svietidla je vyrobené z hliníkovej zliatiny.

Povrchová úprava – komaxit (RAL 9005 alebo RAL 9010) prášková farba, tepelne vytvrdená.

Samotná konštrukcia svietidla ako aj použitie tesnení, káblových priechodiek zabezpečujú príslušné požadované krytie.

Požitím kvalitných komponentov od popredných výrobcov je zabezpečená vysoká kvalita týchto svietidiel.

Svietidla sú konštruované pre čo najľahšie nastavenie, výmenu, údržbu a čistenie.

Čelné sklo – 4mm hrubé, kalené.