

# ALU PROFIL OUTSIDE OPAL

## LED LINEAR LIGHT IP40



Opal diffuser




Hanging system

### Specifications / Špecifikácia

<b>Model</b>	ALU PROFIL OPAL							
<b>Power / Výkon</b>	22 W	29 W	30 W	37 W	44 W	48 W	50 W	51 W
<b>Luminous Flux/Svetelný tok</b>	2975lm	3920lm	4050lm	5000lm	5950lm	6490lm	6760lm	6895lm
<b>Color temperature / farba</b>	4000K							
<b>Electrical class / el. tried</b>	I							
<b>UGR</b>	21							
<b>Color Rendering Index (CRI)</b>	Ra 80 / Ra 90							
<b>Input Voltage Napájanie</b>	200-240VAC							
<b>Power Factor</b>	>0.95							
<b>Frequency</b>	50 / 60 Hz							
<b>Driver Type / Typ napájača</b>	Constant Current (CC) - Not dim driver / DALI driver							
<b>Product Dimension (mm) Rozmer svietidla (mm)</b>	A x B x C 580 x 50 x 50		1140 x 50 x 50		1420 x 50 x 50			
	1680 x 50 x 50		1960 x 50 x 50		2260 x 50 x 50			
<b>Material</b>	<b>Housing / teleso</b>	Aluminium alloy / hliníková zliatina						
	<b>Diffuser / difuzor</b>	Opal/PMMA/ Polymetylmetakrylát						
<b>Accessories / Príslušenstvo</b>	Wall-mounted bracket clamp / Konzola na prichytenie Hanging system 2 x 1,5m / Závesný systém 2 x 1,5m							
<b>Fixture Color/ Farba svietidla</b>	Natural aluminium color							
<b>IP Rating / Krytie IP</b>	IP40							
<b>Life Time / životnosť</b>	>50,000H							
<b>Warranty / záruka</b>	5 Years/5 rokov							
<b>Options / Možnosti</b>	Emergency unit 1h/2h/3h , Núdzová jednotka 1h/2h/3h							

Lighting fixture is available in White or any RAL scale color.  
Available in any length - max 5,0 m.

### Dimensions / Rozmery

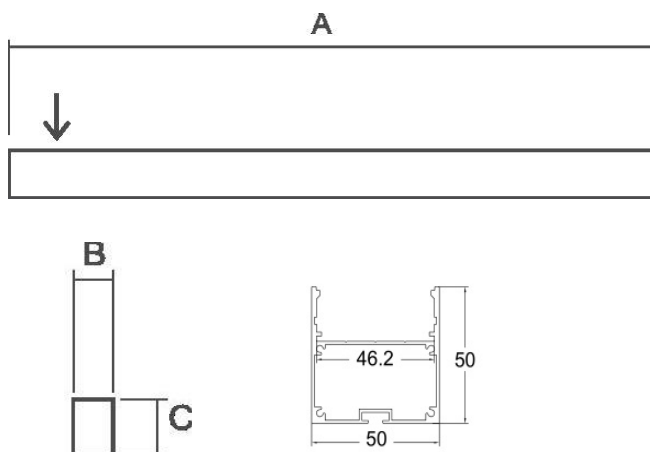

### Photometry

