

DL 1002 T


LED Downlight lights IP20




Specifications / Špecifikácia

Model	DL 1002 T	
Power / Výkon	25 W	
Luminous Flux/Svetelný tok	2613-2750 LM	
Color temperature / farba	3000K / 4000K	
Electrical class / el. tried	I	
UGR	--	
Color Rendering Index (CRI)	Ra 80	
Beam angle Uhol vyžarovania	36 °	
Input Voltage Napájanie	200-240VAC	
Power Factor	>0.90	>0.93
Frequency	50 / 60 Hz	
Operating Temperature Pracovná teplota	70°C	
Driver Type / Typ napájača	Constant Current (CC)	
Product Dimension (mm) Rozmer svietidla (mm)	Ø86x210	
Luminaire Net Weight Hmotnosť svietidla	1.05kg	
Material	Housing / teleso	Aluminum Alloy / hliníková zliatina
	Diffuser / difuzor	PMMA / Polymetylmetakrylát
Fixture Color / Farba svietidla	Black / Čierna - White/Biela	
IP Rating / Krytie IP	IP20	
Life Time / životnosť	>50,000H (Ta=30°L80B10)	
Warranty / záruka	5 Years/rokov	

Dimensions / Rozmery

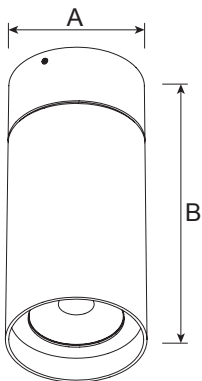

Photometry

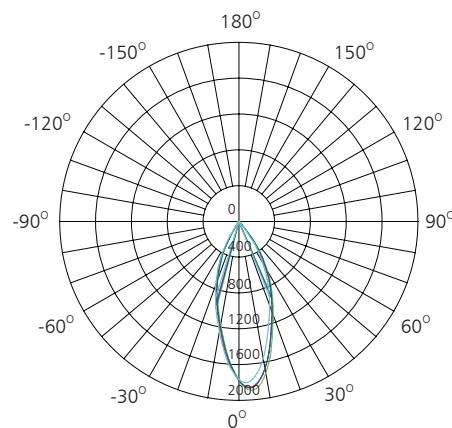

UNIT: cd

- C0/180, 38.9 deg
- C30/210, 38.1 deg
- C60/240, 38.4 deg
- C90/270, 39.3 deg

AVERAGE BEAM ANGLE (50%): 38.6DEG