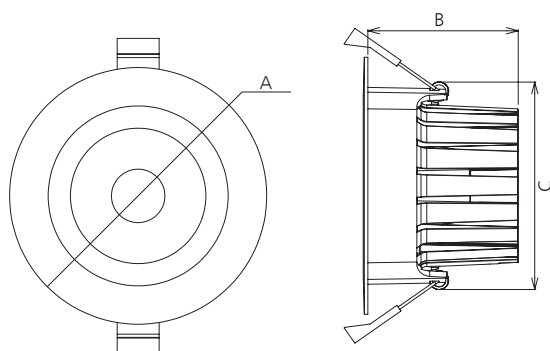
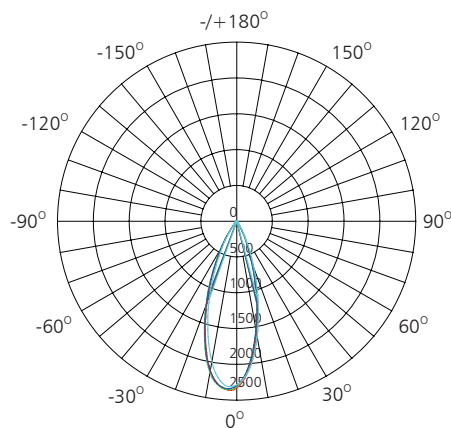



Specifications / Špecifikácia

Model	DL 103 8W	DL 103 10W	DL 103 13W	DL 103 13W
Power / Výkon	8 W	10 W	13 W	13 W
Luminous Flux/Svetelný tok	815 LM	1000 LM	1250 LM	1350 LM
Color temperature / farba	3000K	4000K	2700K	4000K
Electrical class / el. tried	II			
UGR	19			
Color Rendering Index (CRI)	Ra 80			
Beam angle Uhol vyžarovania	36 °			
Input Voltage Napájanie	200-240VAC			
Power Factor	>0.90	>0.93		
Frequency	50 / 60 Hz			
Driver Type / Typ napájača	Constant Current (CC)			
Product Dimension (mm) Rozmer svietidla (mm)	Ø80x40xØ68	Ø90x50xØ75	Ø110x65xØ90	Ø110x65xØ90
Material	Housing / teleso	Diecast aluminum / Tlakovo liaty hliník		
	Diffuser / difuzor	PMMA clear / Polymetylmetakrylát		
Fixture Color / Farba svietidla	White / Biela			
IP Rating / Krytie IP	IP65			
Life Time / životnosť	>50,000H			
Warranty / záruka	2 Years/2 roky			

Dimensions / Rozmery

Photometry

UNIT: cd

- C0/180, 34.7 deg
- C30/210, 34.8 deg
- C60/240, 34.8 deg
- C90/270, 34.6 deg

AVERAGE BEAM ANGLE (50%): 34.7DEG