

# DL 113 A


## LED DOWNLIGHT IP20




### Specifications / Špecifikácia

<b>Model</b>	DL 113A	DL 113A
<b>Power / Výkon</b>	25 W	35 W
<b>Luminous Flux/Svetelný tok</b>	2750LM	3850LM
<b>Color temperature / farba</b>	3000/4000K	
<b>Electrical class / el. tried</b>	II	
<b>UGR</b>	--	
<b>Color Rendering Index (CRI)</b>	Ra 80	
<b>Beam angle Uhol vyžarovania</b>	15 °/24 °/36 °	
<b>Input Voltage Napájanie</b>	200-240VAC	
<b>Power Factor</b>	>0.90	
<b>Frequency</b>	50 / 60 Hz	
<b>Driver Type / Typ napájača</b>	Constant Current (CC)	
<b>Product Dimension (mm) Rozmer svietidla (mm)</b>	A x B 170 x 110	
<b>Material</b>	<b>Housing / teleso</b>	Alluminium alloy / Hlníková zliatina
	<b>Diffuser / difuzor</b>	Clear glass / číre sklo
<b>Fixture Color / Farba svietidla</b>	White / Biela	
<b>IP Rating / Krytie IP</b>	IP20	
<b>Life Time / životnosť</b>	>30,000H	
<b>Warranty / záruka</b>	2 Years/2 roky	

### Dimensions / Rozmery

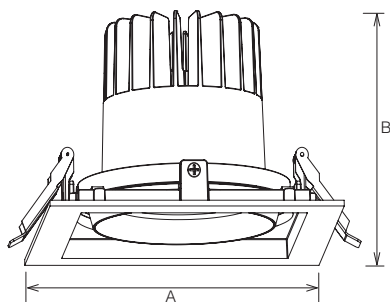

### Photometry

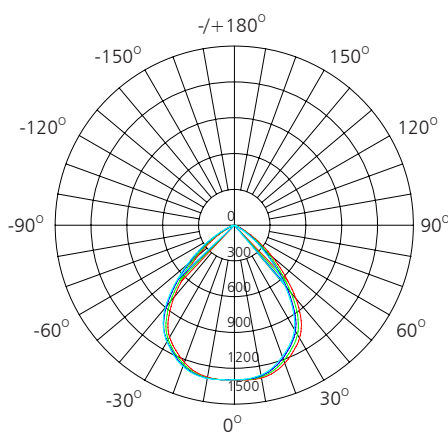

**UNIT: cd**

- C0/180, 87.1 deg
- C30/210, 86.8 deg
- C60/240, 86.7 deg
- C90/270, 86.7 deg

AVERAGE BEAM ANGLE (50%): 86.8DEG