

DL 3000 T


LED Downlight lights IP20




Specifications / Špecifikácia

Model	DL 3000 T
Power / Výkon	23 W
Luminous Flux/Svetelný tok	2050LM
Color temperature / farba	4000K
Electrical class / el. tried	II
UGR	19
Color Rendering Index (CRI)	Ra 80
Beam angle Uhol vyžarovania	60°
Input Voltage Napájanie	200-240VAC
Power Factor	>0.90
Frequency	50 / 60 Hz
Operating Temperature Pracovná teplota	70°C
Driver Type / Typ napájača	Constant Current (CC)
Product Dimension (mm) Rozmer svietidla (mm)	Ø 173x155
Luminaire Net Weight Hmotnosť svietidla	1.1kg
Material	Housing / teleso Aluminum Alloy / hliníková zliatina
	Diffuser / difuzor PMMA / Polymetylmetakrylát
Fixture Color / Farba svietidla	White / Biela
IP Rating / Krytie IP	IP20
Life Time / životnosť	>50,000H (Ta=30°L80B10)
Warranty / záruka	5 Years/rokov

Dimensions / Rozmery

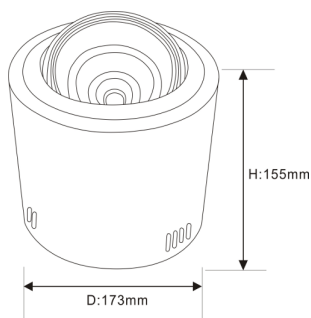

Photometry

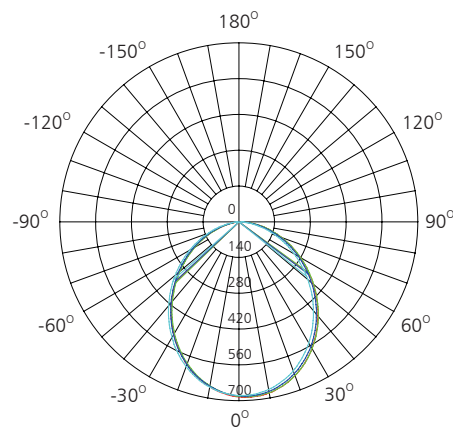

UNIT: cd

- C0/180, 99.9 deg
- C30/210, 99.9 deg
- C60/240, 99.9deg
- C90/270, 99.9 deg

AVERAGE BEAM ANGLE (50%): 99.9DEG