


HFL 1200 UGR13 MULTI LED


LED Hanging fittings / LED Závašné svetidlo

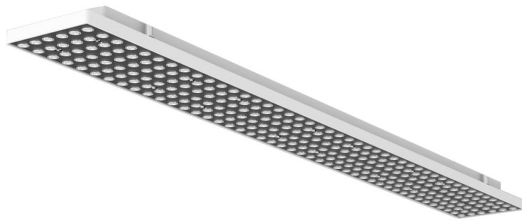

Specifications / Špecifikácia

Model	HFL 1200	HFL 1200	HFL 1200
Power / Výkon	36 W	40 W	48 W
Luminous Flux/Svetelný tok	43 20 LM	4800 LM	5760 LM
Color temperature / farba	CCT 3000 / 4000 / 6000K		
Electrical class / el. tried	I		
UGR	UGR13		
Color Rendering Index (CRI)	Ra 90		
Beam angle Uhol vyžarovania	120 °		
Input Voltage Napájanie	200-240VAC		
Power Factor	>0.90		
Frequency	50 / 60 Hz		
Operating Temperature Pracovná teplota	-20°C ~ +45°C		
Driver Type / Typ napájača	Constant Current (CC)		
Product Dimension (mm) Rozmer svetidla (mm)	A x B x C 1155 x 130 x 57		
Luminaire Net Weight Hmotnosť svetidla	2.55kg		
Material	Housing / teleso	PC / Polykarbonát	
	Diffuser / difuzor	PMMA / Polymetylmetakrylát	
Fixture Color / Farba svetidla	White / Biela		
IP Rating / Krytie IP	IP20		
IK Rating / Krytie IK	IK08		
Life Time / životnosť	>50,000H (Ta=30°L90B10)		
Warranty / záruka	5 Years/rokov		

Dimensions / Rozmery

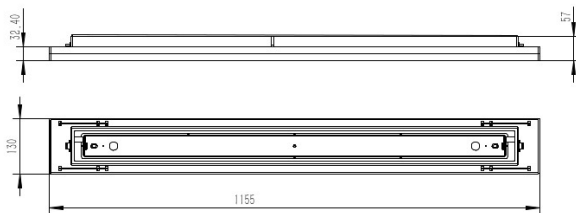

Photometry

